

INTEGRATED LIGHTING AND PROJECTION SOLUTION



PT-JW130GBE



PT-JW130GWE

■ FOR RETAIL, HOSPITALITY, AND EXHIBITION

Ref. No.:	557039	557040
Type	PTJW130GWE	PTJW130GBE
Colour	White	Black
Region	Europe	Europe

Integrated Projector and Lighting Function

Projection lighting presents and displays with creativity and originality. As well as spotlighting objects brightly, the PT-JW130 Series can project video or still images very clearly on or around the subject. This combination of illumination and projection is an effective way to attract attention in retail spaces, restaurants, and more.

- Attractively illuminate food and project images of ingredients, menu information, or scenery in restaurants
- Illuminate artwork and exhibits; project associated information in galleries or museums
- Present products in natural-looking light and display product information and other promotional media

Flexible Installation and Portability

- Compact spotlight-type design harmonizes with most interior designs
- Simple cable duct box for easy installation, removal, and relocation
- Flexible and portable lighting design irradiates all directions below horizon (also compatible with Portrait Mode)
- Wide range of selectable video inputs including SD card, HDMI, wired and wireless LAN
- Lighting Mode for use as spotlight (operation with wireless remote controller)


PT-JW130 Series – 1-Chip DLP™ Projector

Projection Image Size

Diagonal (SD)	Height (SH)	Width (SW)
0.76 m (30")	0.404 m	0.646 m
1.02 m (40")	0.538 m	0.862 m
1.27 m (50")	0.673 m	1.077 m
1.52 m (60")	0.808 m	1.292 m
1.78 m (70")	0.942 m	1.508 m
2.03 m (80")	1.077 m	1.723 m
2.29 m (90")	1.212 m	1.939 m
2.54 m (100")	1.346 m	2.154 m

Projection Distance (L)

Min. (LT)	Max. (LT)
0.95 m	2.10 m
1.28 m	2.81 m
1.61 m	3.52 m
1.94 m	4.23 m
2.27 m	4.94 m
2.60 m	5.65 m
2.93 m	6.36 m
3.26 m	7.07 m

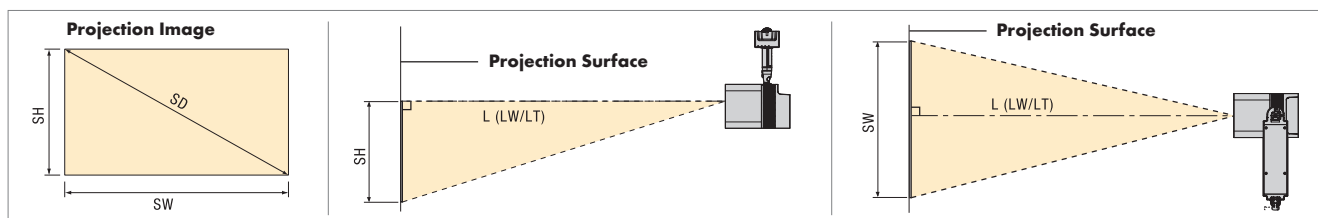

Specifications

PT-JW130GWE/PT-JW130GBE

Power supply	100–240 V AC, 1.4–0.6 A, 50/60 Hz	Installation	[FRONT] [REAR] (On/Off of vertical flip can be set with [VERTICAL FLIP])
Power consumption	125 W (0.5 W with STANDBY MODE set to ECO*1, 6 W with STANDBY MODE set to NETWORK*2, 11 W with STANDBY MODE set to NORMAL)	Terminals	HDMI IN: HDMI 19-pin x 1 (compatible with HDCP) LAN: RJ-45 x 1 for network connection, 100Base-TX, 10Base-T, compatible with PLink™ (Class 1) Audio output: 3.5 mm stereo mini plug DC OUT: USB connector (type A) x 1, for power supply (DC 5 V, maximum 900 mA)
Panel display method	DLP™ chip x 1	Card slot	SD card slot*6 x 1 (supports SDHC memory card)
Pixels	1,039,680 pixels (WXGA comparable)	Weight	3.2 kg (7.1 lbs.)
Recommended resolution	1,280 x 800 pixels	Operation noise*3	36 dB when LIGHT POWER set to Normal, 30 dB when LIGHT POWER set to ECO
Lens	Powered zoom: 1.0x–2.2x Powered focus: F = 2.0–2.7, f = 15.2–32.7 mm	Operating environment	Temperature*7: 0 °C (32 °F) to 40 °C (104 °F) Humidity: 10% to 80% (no condensation)
Throw ratio	1.5–3.3:1	Supplied accessories	Adapter, Connector secure lock, Adapter cover, Allen wrench, String, Wireless remote control, Batteries for remote control (AAA/R03 or AAA/LR03 x 2), Card slot cap, HDMI terminal cap, LAN terminal cap, Software CD-ROM
Light source	Laser diode		
Brightness*3	1,000 lm (ANSI)		
Contrast ratio*3	1,000:1		
Screen size	0.76–5.08 m (30–200 inches) diagonally 16:10 aspect ratio		
Scanning frequency	HDMI: fH: 27–100 kHz, fV: 24–120 Hz, dot clock: 25–162 MHz		
Keystone correction range	Vertical: ±40°*4, horizontal: ±40°*5, 4-point: ±40°		

*1 When STANDBY MODE is set to ECO, network functionality (both wireless LAN and wired LAN) is not available.

*2 When STANDBY MODE is set to NETWORK, network functions are restricted to projector operations via wired LAN using the Wake-on-LAN function.

*3 Measurement, measuring conditions, and method of notation all comply with ISO 21118 international standards.

*4 With vertical correction only. *5 With horizontal correction only.


*6 Operation of Panasonic SD memory cards of up to 2 GB capacity and Panasonic SDHC memory cards of up to 32 GB capacity is confirmed.

*7 Operating environment temperature should be between 0 °C (32 °F) and 35 °C (95 °F) when the projector is used at elevations between 1,000 m (3,281') and 2,700 m (8,858') above sea level.

When operating environment temperature exceeds 30 °C (86 °F) at this altitude, light output may be reduced to protect the projector. When the projector is used at elevations lower than 1,000 m (3,281') above sea level and the operating environment temperature exceeds 35 °C (95 °F), light output may be reduced to protect the projector.

Dimensions

Unit: mm [inch]

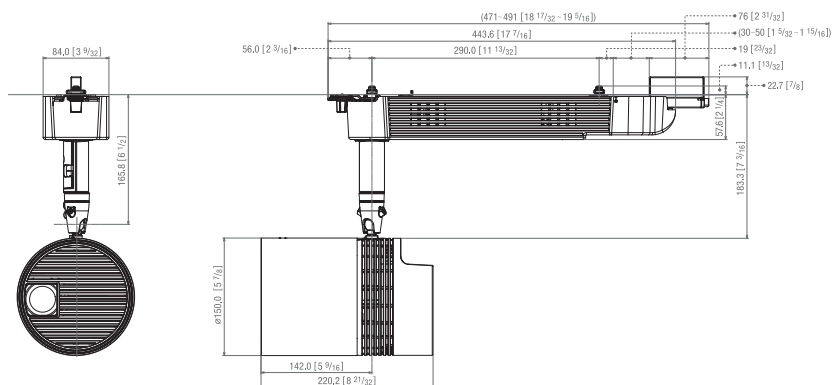

Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice. Product availability varies depending on region and country. This product may be subject to export control regulations. The projection distances and throw ratios in this leaflet are for use as guidelines only. For more detailed information, please consult the dealer from whom you are purchasing the product. DLP, DLP logo and DLP Medallion logo are trademarks or registered trademarks of Texas Instruments. The PLink trademark is an application trademark in Japan, the United States, and other countries and regions or registered trademarks. HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. All other trademarks are the property of their respective trademark owners.



For more information please visit
www.vossloh-schwabe.com/en/home/products/space-player.html